


New ML Lux Series

Luxury and elegance  
of fire



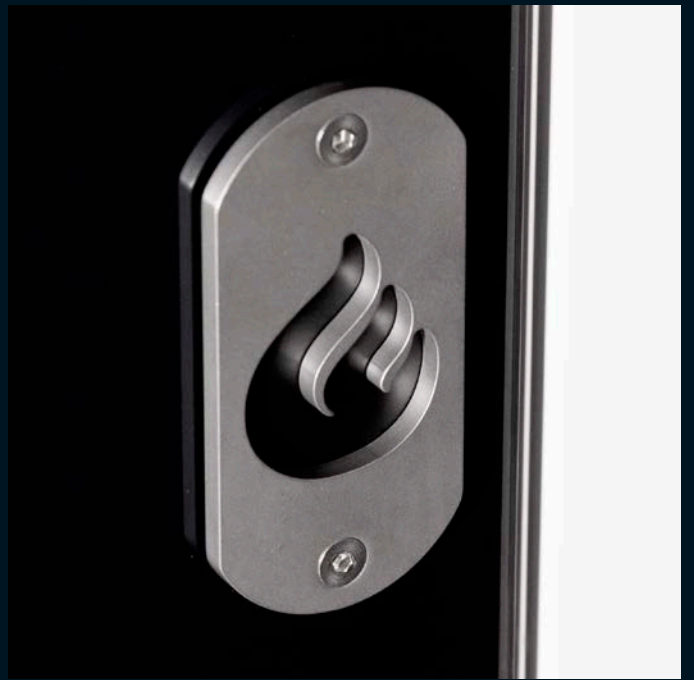

NEW ML LUX SERIES.  
A GREAT WOOD FIRED COOKER  
IT IS RECOGNIZED BY ITS LOOK.

ML 60 Lux

The range of the already articulated M Series expands with the arrival of the New ML Lux Series, a wood fired cooker available in two sizes (60 and 80 cm wide) that boasts an extremely elegant look, characterized by fully glazed doors. To complete one of the most modern aesthetics on the market, there are three new metallic colors (Silver, Pearl, Bronze) which are added to the color range of the series. The result is a unique wood-burning stove, capable of enhancing the already extraordinary features of the M Series: unrivaled vision of the fire, maxi combustion chamber, super-large oven.

The technologies inside the wood fired cooker are also extraordinary, thanks to which ML Lux has earned the best European certifications in terms of low emissions in the atmosphere.



Certifications:



Certified technologies:





Rizzoli

50 100 150 200 250  
min max



ML 80 Lux

MAXI  
FIRE  
CHAMBER

MAXI  
PANORAMIC  
OVEN

FIRE DOOR  
AND OVEN DOOR  
FULLY  
GLAZED

OVEN WITH  
DOUBLE  
GLASS,  
LIGHT AND  
THERMOMETER

ALWAYS COLD  
THERMALLY  
INSULATED  
HANDLES

HIGH  
QUALITY  
REFRACTORY  
MATERIAL

## TECHNICAL SPECIFICATIONS

Model	Width	Depth	Height <sup>(1)</sup>	Top thickness	Top protrusion	Riser	Hotplate diameter	Combustion chamber (average value)	Combustion chamber (lxh)	Weight (kg.)	Oven dimensions (lpxh)	Total nominal power (kW)	Efficiency at nom. power %	Discharge gas flow (g/s)	Discharge gas temperature (°C) <sup>(2)</sup>	Suggested draught (Pa)
ML 60 Lux	600	600	850	30	20	40x15	238	250	300x196	180	350x470x260	8,0	80,2	10,0	191	10
ML 80 Lux	800	600	850	30	20	40x15	280	250	500x196	230	550x470x260	8,0	80,2	10,0	191	10

Dimensions in mm

(1) Over top dimension (riser excluded).

(2) Average temperature at nominal power. It is possible to obtain higher fumes temperatures. It is recommended to use only pipes with minimum specify T400.

## ENDOWMENTS

Model	External air intake - External Air®	Certified combustion system Superflame®	Sys. for the safe built-in into furn. Surround Heat®	Primary air regulation	Pre-heated secondary air	Aerated sides with natural convection	Fire door with self-cleaning system Shiny Glass®	Fire door with double glass	Reversible fire door	Oven door with double glass and thermometer	Multiflue	Oven with electrical illumination	Telescopic pullout for baking pan	Always cold handles thermally isolated	Fire door protection	Frontal handrail	Lateral handrail	Plate cover	Spacers	Profiles for top	Glass ceramic plate <sup>(1)</sup>	Maintenance kit
ML 60 Lux	🔥	🔥	🔥	🔥	🔥	🔥	🔥	🔥	🔥	🔥	🔥	🔥	🔥	🔥	🔥	🔥	🔥	🔥	🔥	🔥	🔥	🔥
ML 80 Lux	🔥	🔥	🔥	🔥	🔥	🔥	🔥	🔥	🔥	🔥	🔥	🔥	🔥	🔥	🔥	🔥	🔥	🔥	🔥	🔥	🔥	🔥

🔥 standard   🌿 on demand   🔥 optional

(1) Only for wood fired cookers with rear flue outlet.

## MODEL



ML 60 Lux

ML 80 Lux

Partner:



Rizzoli s.r.l. - Single seat

Zona Artigianale 1, - Frazione San Lugano - 39040 - Trodena nel Parco Naturale (BZ) - Italia  
Tel. +39 0471 887551 - info@rizzolicucine.it - www.rizzolicucine.it



#rizzolicucine